



## **AEROSPACE INDUSTRIAL FIRE SLEEVE** **Approved AS 1072 & ISO 2685**

La Gamme GPT, gaine de protection thermique est destinée à la protection de câble ou flexible.  
Température d'utilisation : Temperature range + 260° C / 1832° F.  
Piques de T° : 1000° C durant 15 min 1600° C durant 15 s

Burning behaviour: 7 s to extinction without afterglow (US Fed. Spec. CCT-191-B)

**Diamètres possibles: (en mm extrapolés des ‘‘)**

10 mm	22 mm	38 mm	57 mm	89 mm
11 mm	25 mm	41 mm	63 mm	95 mm
12 mm	28 mm	44 mm	70 mm	102 mm
16 mm	32 mm	48 mm	76 mm	114 mm
19 mm	35 mm	51 mm	82 mm	128 mm

## **AEROSPACE MARINE INDUSTRIAL** **DUCTING&HOSES Approved iso M0 & F0**



ZAC des Iles

6930 Marcilly d'Azergues  
France

**EEMI**


Tél: +33 (0)4 37 460 460

Fax: +33 (0)4 72 54 39 08

This document and part of are the copyright off EEMI



## AEROSPACE & PERFORMANCE HOSES

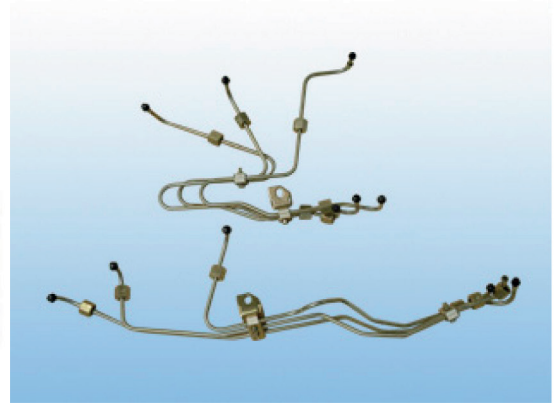

**Stainless Steel Hoses, PTFE SS Braid, Aluminum, Carbon Steel, Nylon , ARAMIDE , Fire resistant**

**Our Know How, is make Assembled Flexible Hoses: According The USA and European Aerospace Specifications For : Hydraulic, Brakes liquids, Kerosene , petrol , oil transfer...**

**We produce Formed Metal tubes: Titanium, Stainless steel, Aluminum, Steel, etc ...**

**Group certified: ISO 9001-2000 and UN 9100.**

